

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)


PCT

(10) International Publication Number
WO 2005/063565 A1

- (51) International Patent Classification⁷: **B64C 21/06**, 21/02
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **SCHRAUF, Geza** [DE/DE]; Carl-Schurz-Strasse 113, 28209 Bremen (DE).
- (21) International Application Number: **PCT/EP2004/014617**
- (74) Agent: **KOPF, Korbinian**; Maiwald Patentanwalts GmbH, Elisenhof, Elisenstrasse 3, 80335 München (DE).
- (22) International Filing Date: **22 December 2004 (22.12.2004)**
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
103 61 390.0 29 December 2003 (29.12.2003) **DE**
- (71) Applicant (for all designated States except US): **AIRBUS DEUTSCHLAND GMBH** [DE/DE]; Kreetzlag 10, 21129 Hamburg (DE).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR SUCTIONING THE BOUNDARY LAYER

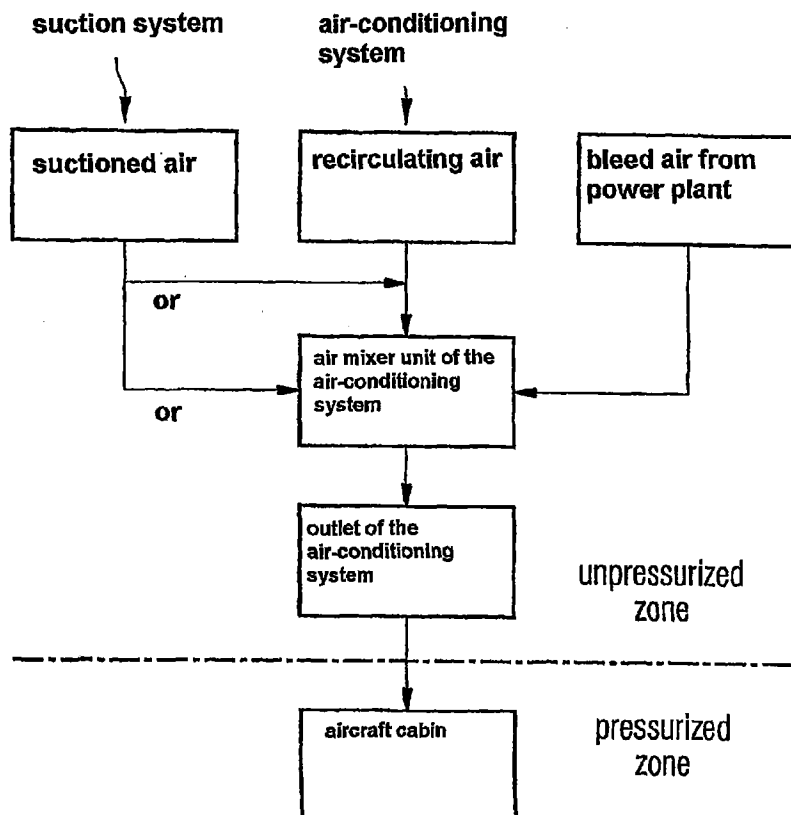

(57) Abstract: A method for suctioning the boundary layer at the surface (1) of an aircraft having an air-conditioning system (4), at whose flow-critical points of the surface multiple suction openings (2) are provided, the air quantity suctioned via these being discharged to the atmosphere again via at least one outlet (7) placed in a way favorable for flow, the air quantity suctioned from the surface (1) being fed to the air-conditioning system (4) of the aircraft, via whose outlet (7) the air quantity suctioned is discharged to the atmosphere together with the exhaust air of the air-conditioning system (4), to reduce flow losses.

WO 2005/063565 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

— with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report